Arntz



PRODUCT CATALOG

BAND SAW BLADES

VALID FROM
01.2026

HIGH PERFORMANCE BAND SAW BLADES

Category: Standard Professional Professional Plus

BI-METAL

Category	Article group / Name	Technical feature	Material	Page
	431 SPRINT-PLUS	M42 R-TEC OPTIONAL		14
	531 SPRINT-PRO	M51 R-TEC OPTIONAL		15
	457 X-FIT	M42		16
	458 X-FIT MAX	M42 MAX		17
	557 X-PRO	M51		18
	558 X-PRO MAX	M51 MAX		19
	440 X-CELL	M42 R-TEC OPTIONAL		20
	540 X-CELL PRO	M51 R-TEC OPTIONAL		21
	401 VL-PLUS	M42		22
	402 VL-GP	M42		23
	490 PAL-CUT	M42		25

CARBIDE TIPPED

Category	Article group / Name	Technical feature	Material	Page
	626 BLACK-LINE TC	R-TEC OPTIONAL		28
	622 BLACK-LINE S	R-TEC OPTIONAL		29
	650 SILVER-LINE	R-TEC OPTIONAL		30
	660 SL-9	R-TEC OPTIONAL		31
	651 SILVER-LINE N			32
	643 ALU-LINE			33
	623 STONE-LINE S			34
	621 STONE-LINE RT			34

CARBON 100 CS-1 / 110 CS-2 35

PROFESSIONAL ACCESSORIES 35

EXPLANATION OF SYMBOLS

- solid material round small
- solid material round medium
- solid material round large
- solid material square large
- solid material special alloy
- solid material rectangular large
- solid material rectangular very large
- sheet panel
- small round tube standard wall thickness
- small round tube thin wall thickness
- round tube heavy walled
- bundle of tubes
- square tube large
- aluminium profile
- steel beam standard
- steel beam wide flange
- steel beam heavy walled
- steel U channel
- steel L angle
- surface hardened material
- aluminium, non-ferrous, graphite
- stone
- pallet
- ramping technology optional
- tooth set
- extra wide tooth set

PRECISION FOR OVER 230 YEARS

ARNTZ is more than a company, we are a living piece of industrial history. Rooted in the Bergisches Land, the cradle of German metalworking, we stand as Remscheid's oldest tool manufacturer and a seventh-generation family business, combining tradition with technological progress.

What began in 1793 has evolved into an internationally operating technology leader in high-performance band saw blades, with production facilities in Germany and the USA. Over two centuries of metalworking expertise are built into every product, forming the foundation for precision tools used in more than 80 countries worldwide. A striking example is the millimeter-accurate machining of the double T-beams for the One World Trade Center in the USA, carried out with band saw blades from ARNTZ.

Our solutions cover a broad range of applications, from cutting tubes and profiles to the precise machining of high-strength titanium forgings for medical implants. Every production step passes through a multi-stage control system to ensure consistently measurable top quality.


FACTS AND FIGURES

- Established in 1793 by Johann Wilhelm Arntz
- 7th generation ownership
- Over 230 years of tooling production
- Manufacturer of high-performance Band Saw Blades
- Manufacturing locations in Germany and USA
- Global distribution network covers 80 countries



Jan Wilhelm Arntz,
CEO

AT YOUR SIDE WORLDWIDE

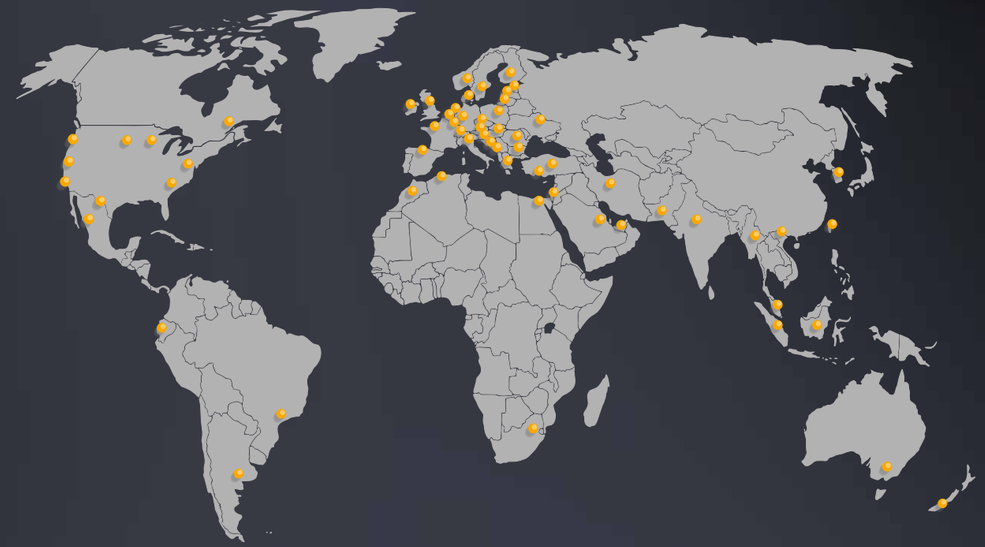



Johann Wilhelm Arntz
*1763 † 1834




Johann Ferdinand Arntz
*1806 † 1867



Johann Wilhelm Arntz
*1846 † 1908



Johann Wilhelm Arntz
*1873 † 1932



Johann Wilhelm Arntz
*1908 † 1957



Johann Wilhelm Arntz
*1939 † 2021

1793 Company founded as a hammer mill

1879 Relocation to Lenneper Str., RS

1900 Saw blade production

1944 Production of segmental circular saw blades

1966 Entry Johann Wilhelm Arntz

1978 Production of carbide circular saw blades

1981 Foundation ARNTZ, Inc. in Summerville, USA

1988 Start production of Bi-Metal Band Saw Blades

1990 Foundation of ARNTZ Sägetechnik GmbH Schmölln

1996 Entry Jan Wilhelm Arntz

1999 Foundation ARNTZ Netherlands

2001 Start of Carbide Tipped Band Saw Blade production

2010 Foundation of the welding centre Schmölln

2015 Relocation / site expansion ARNTZ SLN

2017 Expansion of Bi-Metal and carbide production capacity

2022 Capacity expansion to one of the largest welding centres in Europe

2023 230 years ARNTZ

2025 ARNTZ Campus

PRODUCTION

Bi-Metal and Carbide Tipped Band Saw Blades

Our state-of-the-art facility is equipped with cutting-edge technology along with innovative design to optimize efficiency and precision while raising production and service standards. This ensures that every product reflects our craftsmanship, consistency as well as reliability to ensure customer satisfaction.



THE RIGHT BREAK-IN

Guarantee for extended blade life

Breaking in a Band Saw Blade is essential to ensure its optimal performance and longevity. This process involves gradually acclimating the blade to tension, temperature, running the machine at slower cutting rates to ensure proper functionality before full operation.

Why is Break-in important?

- New teeth are very sharp and fragile
- Prevents premature tooth edge fracturing
- Break-in improves overall blade life and cut finish

Instructions

- Reduce band speed by 20 % (if you have vibration continue to reduce)
- Reduce feed rate by 20 % to 50 % depending on material machinability (Harder material requires a higher feed rate reduction)
- Small adjustments to blade speed or feed rate may be necessary if noise or vibration occurs
- Gradually increase feed rate until normal cutting rate are achieved



MISSION STATEMENT – THE **ARNTZ 3S**



SIMPLIFY We have a complete product range that offers a competitive and concise solution to the most diverse sector needs on the market

SUPPORT We have a dedicated, skilled and qualified team to support on-site as well as on the phone

SERVICE We are dedicated to offer efficient and consistent service solutions to an increasingly demanding market

TOOTHING GUIDELINE

Toothing recommendation for thin-walled profiles

Wall thickness	Profile outer diameter per inch						
inch	3/4	1 1/2	2 1/2	3	4	5	6
1/16	14	14	14	14	14	14	10/14
1/8	14	14	14	14	10/14	10/14	8/11 | 8/12
3/16	14	14	10/14	10/14	8/11 | 8/12	8/11 | 8/12	6/10
7/32	14	10/14	10/14	8/11 | 8/12	8/11 | 8/12	6/10	6/10
1/4	14	10/14	8/11 | 8/12	8/11 | 8/12	6/10	6/10	5/7 | 5/8
29/93	14	8/11 | 8/12	6/10	6/10	5/7 | 5/8	5/7 | 5/8	5/7 | 5/8
3/8	-	6/10	6/10	5/7 | 5/8	5/7 | 5/8	5/7 | 5/8	–

Toothing recommendation for thick-walled profiles

Wall thickness	Profile outer diameter per inch							
inch	3	4	5	6	8	12	20	30
3/8	-	-	-	4/6	4/6	4/6	3/4	2/3
9/16	4/6	4/6	4/6	4/6	4/6	3/4	2/3	2/3
3/4	4/6	4/6	4/6	4/6	3/4	3/4	2/3	2/3
1	4/6	4/6	4/6	3/4	3/4	2/3	2/3	2/3
2	-	-	3/4	3/4	2/3	2/3	2/3	1,4/2
3	-	-	-	-	2/3	2/3	1,4/2	1,4/2
4	-	-	-	-	-	2/3	1,4/2	1,4/2

Toothing recommendation for solid material

Cross section	Teeth per inch
inch	tpi
from 21	0,75/1,25
15 – 30	1/1,3
10 – 21	1,4/2
5 – 13	2/3
4 – 7	3/4
3 – 6	4/6
2 – 3	5/7 | 5/8
1 – 2	6/10
3/4 – 1	8/11 | 8/12
to 1	10/14

Quick Tips

- The required tooth pitch depends on the wall thickness and diameter of the profiles tobe cut. The tables apply to single cuts. If two or more profiles are cut next to each other, the tables apply taking into account two times the wall thickness with a single profile outer diameter
- Always ensure at least 3 teeth are in contact with the material for clean cuts and to avoid blade binding
- For wider material, use lower TPI to reduce strain and improve chip clearance
- For smaller materials, use higher TPI to prevent tearing or jagged edges

Bi-Metal and Carbide Tipped Band Saw Blades

For each cutting operation the right choice.

		431	531	457	458	557	558	440	540	401	402	626	622	650	660	651	643
		M42-SPRINT-PLUS	M51-SPRINT-PRO	M42-X-FIT	M42-X-FIT MAX	M51-X-PRO	M51-X-PRO MAX	M42-X-CELL	M51-X-CELL PRO	M42-VL-PLUS	M42-VL-GP	BLACK-LINE-TC	BLACK-LINE-S	SILVER-LINE	SL-9	SILVER-LINE N	ALU-LINE
	Page	14	15	16	17	18	19	20	21	22	23	28	29	30	31	32	33
Material dimension (inch)																	
- Structural steels	‹ 2.75	■		■						■	■						
- Case-hardening steels	3 - 13	■		■	■	■	■	■		■	■	■					
- Free machining steels	› 13	■						■		■		■					
- Unalloyed tool steels	‹ 2.75	■								■							
- Spring steels	3 - 13	■				■		■		■		■					
- Ball bearing steel	› 13	■						■		■		■					
- High speed steels	‹ 2.75	■								■							
- Cold-work steels	3 - 13	■				■		■		■		■		■	■		
	› 13	■	■					■	■	■		■		■	■		
- Nitride steels	‹ 2.75	■								■							
- Heat treatable steels	3 - 13	■				■		■		■		■		■	■		
- Hot working steels	› 13	■	■					■	■	■		■		■	■		
- Stainless steels	‹ 2.75	■	■							■							
	3 - 13		■			■			■			■	■	■	■		
	› 13		■						■			■	■	■	■		
- High temperature steels	‹ 2.75		■														
- Heat resistant steels	3 - 13		■						■					■	■		
	› 13		■						■					■	■		
- High tensile steels	‹ 2.75		■														
- Titanium + titanium alloys	3 - 13		■						■				■	■	■		
- Nickel alloys	› 13		■						■				■	■	■		
- Surface hardened steel shafts	‹ 2.75																
- Hardened steels up to HRC 62	3 - 13															■	
- Hardchromed materials	› 13															■	
- Steel castings	‹ 2.75	■								■							
- Cast irons	3 - 13	■						■		■		■		■	■		
	› 13	■						■		■		■		■	■		
- Aluminium	‹ 2.75	■								■			■				
- Copper	3 - 13	■						■		■		■	■	■	■		■
	› 13	■						■		■		■		■	■		■
- Brass	‹ 2.75	■								■			■				
- Bronze	3 - 13	■						■		■		■	■	■	■		■
- Red brass	› 13	■						■		■		■		■	■		■
- Aluminium + alloys	‹ 2.75		■										■				
- Aluminium alloys with silicon	3 - 13		■						■			■	■	■	■		■
	› 13		■						■			■		■	■		■

Qualification: ■ very good ■ good

R-TEC

Faster, Straighter, Longer!

R-TEC OPTIONAL

Second generation ramping technology with improved design capability to give custom made solutions to the most challenging applications.

Benefits

- Increases tooth penetration without adding more machine feed pressure
- Allows the blade to cut a wider range of dimensions
- Precise edge radius control to reduce backer fatigue and improve blade life
- A fully redesigned machine to support coolant and filtration systems to increase speed, keeping production costs low
- Newly designed propriety software gives us maximum versatility in ramp design

R-TEC

BI-METAL – WHY SO SUCCESSFUL?

The backer of the Bi-Metal Band Saw Blade is made of specially alloyed spring steel. Highly flexible with a strength of approx. 50 HRC.

HARD AND RESISTANT

Tooth tips made from hardened HSS in qualities M42 and powder metallurgical M51 ensure the highest wear resistance due to an extensive heat treatment.

OPTIMALLY CONNECTED


The backer and the HSS flat wire are undetachably welded together by a special electron or laser beam welding process.

ADVANTAGES


The high-quality Bi-Metal Band Saw Blade combines the flexibility of the spring steel backer with the enormous wear resistance of the high speed steel. Each tooth tip of the finished band is made of hardened HSS, extremely durable for best performance.

M42
Material 1.3247
Hardness approx. 68 - 69 HRC

M51
Material 1.3207
Hardness approx. 69 HRC, with high tungsten and cobalt content.

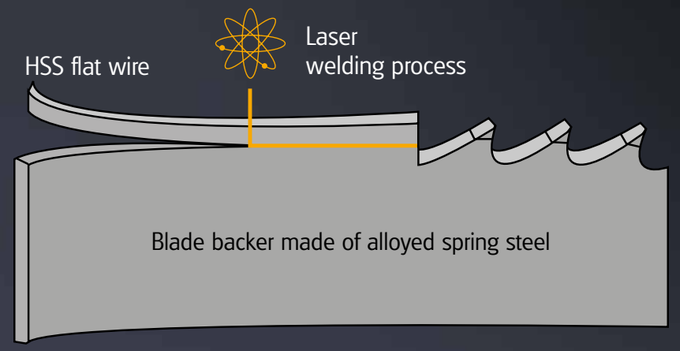

BAND SAW GEOMETRY – TERMINOLOGY

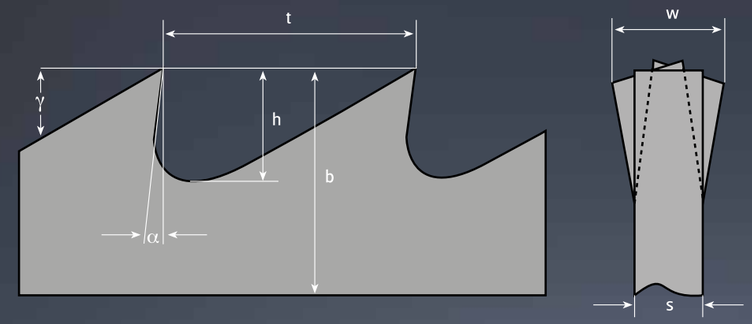


b = width of blade
s = thickness of blade
h = gullet depth
t = tooth pitch
α = rake angle
γ = clearance angle
w = width of set

MULTIPURPOSE, STEEL MANUFACTURING, RECYCLING/FOUNDRIES

■□□ 431 SPRINT-PLUS





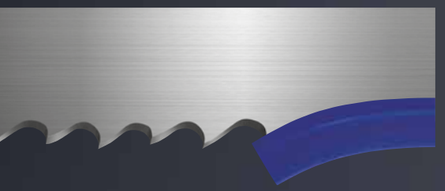


- Classic tooth geometry to suit all your generalpurpose needs
- Variable tooth design for a wider range of material sizes
- M42 HSS tooth tip for long and reliable performance

Dimensions		Tooth ■ 10°					■ 0°					
inch	mm	0,75/1,25	1,4/2	2/3	3/4	4/6	5/8	6/10	8/12	10/14	14	18
3/4 x .035	20 x 0,90					■	■	■	■	■	■	■
1 x .035	27 x 0,90			■	■	■	■	■	■	■	■	
1 1/4 x .042	34 x 1,10		■	■	■	■	■	■	■			
1 1/2 x .050	41 x 1,30		■	■	■	■	■					
2 x .050	54 x 1,30		■	■								
2 x .063	54 x 1,60	■	■	■								
2 5/8 x .063	67 x 1,60	■	■									
3 x .063	80 x 1,60	■	■									

431 STAY INFORMED

STEEL MANUFACTURING, AEROSPACE/PRECISION METAL WORKING

■■□ 531 SPRINT-PRO

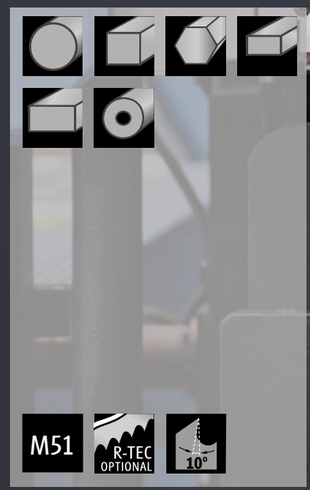



- Classic tooth geometry to suit all your generalpurpose needs
- Variable tooth design for a wider range of material sizes
- M51 HSS tooth tip for improved wear resistance



Dimensions		Tooth					
inch	mm	0,75/1,25	1,4/2	2/3	3/4	4/6	5/8
1 x .035	27 x 0,90			■	■	■	■
1 1/4 x .042	34 x 1,10		■	■	■	■	
1 1/2 x .050	41 x 1,30		■	■	■		
2 x .063	54 x 1,60	■	■	■			
2 5/8 x .063	67 x 1,60		■				
3 x .063	80 x 1,60	■	■				

STAY INFORMED 531

GENERAL FABRICATION, STEEL CONSTRUCTION

457 X-FIT








- Robust tooth geometry that provides excellent shock resistance
- Modified guilt design to reduce vibration
- Progressive tooth set produces a smooth work-piece surface and a cut with little burr

Dimensions		Tooth				
inch	mm	2/3	3/4	4/6	5/7	8/11
3/4 x .035	20 x 0,90			■	■	■
1 x .035	27 x 0,90		■	■	■	■
1 1/4 x .042	34 x 1,10	■	■	■	■	
1 1/2 x .050	41 x 1,30	■	■	■		
2 x .050	54 x 1,30	■	■	■		
2 x .063	54 x 1,60	■	■	■		
2 5/8 x .063	67 x 1,60	■	■			

STAY INFORMED 457

STEEL CONSTRUCTION

458 X-FIT MAX

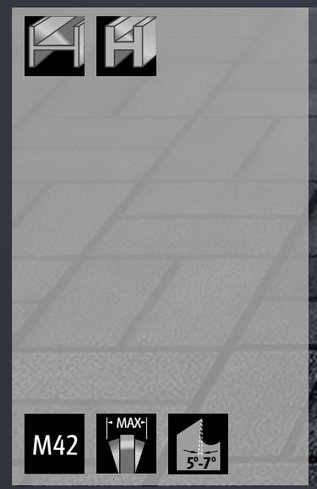



- The powerhouse for machining large profiles and beams
- Extended blade life due to robust tooth design even in bundle cutting with chip nests
- Extra wide set prevents jamming in materials with high residual stress




Dimensions		Tooth		
inch	mm	2/3	3/4	4/6
1 1/4 x .042	34 x 1,10		■	
1 1/2 x .050	41 x 1,30	■	■	■
2 x .063	54 x 1,60	■	■	
2 5/8 x .063	67 x 1,60	■	■	

STAY INFORMED 458

STEEL CONSTRUCTION

557 X-PRO



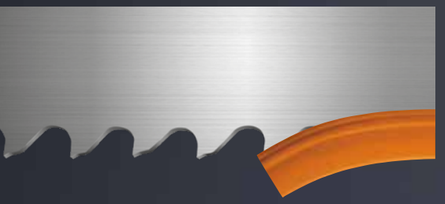


- Enhanced Wear Resistance due the M51 edge creates exceptional hardness and wear resistance
- The M51 used in X-PRO maintains its hardness even at higher cutting temperatures to prevent premature tip dulling
- Improved Edge Retention allows for consistent, high-quality cuts over extended periods

Dimensions		Tooth	
inch	mm	2/3	3/4
1 1/2 x .050	41 x 1,30	■	■
2 x .050	54 x 1,30	■	■
2 x .063	54 x 1,60	■	■
2 5/8 x .063	67 x 1,60	■	■

557 STAY INFORMED

STEEL CONSTRUCTION

558 X-PRO MAX

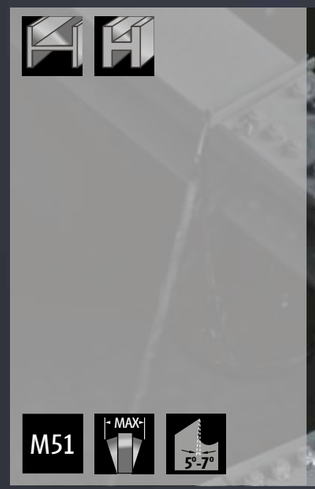





- The extra-heavy set design, combined with M51' s hardness, enhances the blade's ability to withstand higher stresses and resist wear
- Superior Heat Resistance for Heavy-Duty Cuts due to the M51 steel' s high-temperature performance
- The X-PRO extra-heavy set allows for a more aggressive cutting action, providing better chip removal and reducing the risk of pinching


Dimensions		Tooth	
inch	mm	2/3	3/4
2 x .063	54 x 1,60	■	■
2 5/8 x .063	67 x 1,60	■	■

STAY INFORMED 558

STEEL MANUFACTURING, AEROSPACE/PRECISION METAL WORKING

440 X-CELL



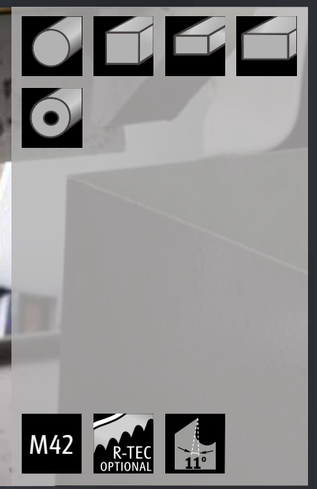




- Aggressive tooth geometry to improve penetration in work-hardening applications
- Variable set and high-low tooth pattern for added penetration while reducing vibration
- High Chrome premium backer for a long blade life

Dimensions		Tooth				
inch	mm	0,75/1,25	1/1,3	1,4/2	2/3	3/4
1 1/4 x .042	34 x 1,10				■	■
1 1/2 x .050	41 x 1,30			■	■	■
2 x .050	54 x 1,30		■	■	■	■
2 x .063	54 x 1,60		■	■	■	■
2 5/8 x .063	67 x 1,60	■	■	■		
3 x .063	80 x 1,60	■	■	■		

440 STAY INFORMED

STEEL MANUFACTURING, AEROSPACE/PRECISION METAL WORKING

540 X-CELL PRO

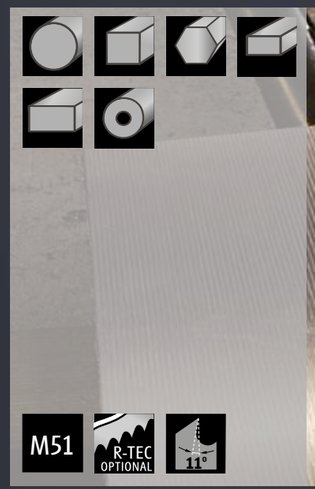



- Aggressive tooth geometry to improve penetration in work-hardening applications
- Variable set and high-low tooth pattern for added penetration while reducing vibration
- M51 HSS tooth tip for improved wear resistance



Dimensions		Tooth				
inch	mm	0,75/1,25	1/1,3	1,4/2	2/3	3/4
1 1/2 x .050	41 x 1,30			■	■	■
2 x .050	54 x 1,30		■	■	■	■
2 x .063	54 x 1,60		■	■	■	■
2 5/8 x .063	67 x 1,60	■	■	■		
3 x .063	80 x 1,60	■	■	■		

STAY INFORMED 540

MULTIPURPOSE, STEEL MANUFACTURING, RECYCLING/FOUNDRIES

▪▫▫ 401 VL-PLUS






- The budget-friendly choice with a wide range of tooth profiles
- Versatile application for thin-walled profiles up to large solid material workpieces

Dimensions		Tooth	▪ 10°			▪ 0°			
inch	mm	1,4/2	2/3	3/4	4/6	5/8	6/10	8/12	10/14
1/4 x .035	6 x 0,90								▪
3/8 x .035	10 x 0,90								▪
1/2 x .025	13 x 0,65					▪	▪	▪	▪
1/2 x .035	13 x 0,90						▪	▪	▪
3/4 x .035	20 x 0,90				▪	▪	▪	▪	▪
1 x .035	27 x 0,90		▪	▪	▪	▪	▪	▪	▪
1 1/4 x .042	34 x 1,10		▪	▪	▪	▪	▪	▪	▪
1 1/2 x .050	41 x 1,30	▪	▪	▪	▪				
2 x .050	54 x 1,30			▪	▪				
2 x .063	54 x 1,60	▪	▪	▪	▪				
2 5/8 x .063	67 x 1,60	▪	▪						

401 STAY INFORMED


GENERAL FABRICATION, STEEL CONSTRUCTION

▪▫▫ 402 VL-GP

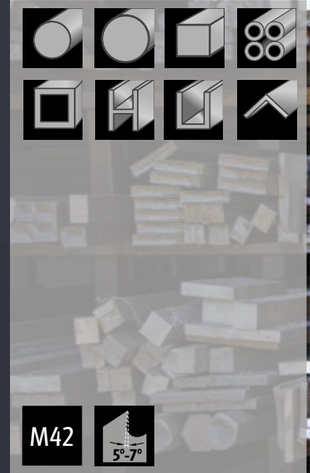



- The budget-friendly multitool with a robust tooth design for varying cutting tasks
- Saves inventory costs with extended tool life in mixed operations
- Reduced blade change

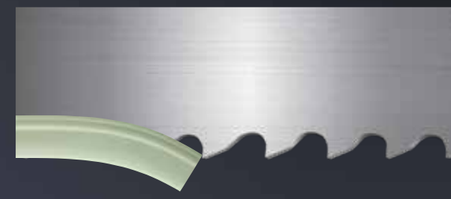

Dimensions		Tooth					
inch	mm	2/3	3/4	4/6	5/7	8/11	12/16
3/4 x .035	20 x 0,90				▪	▪	▪
1 x .035	27 x 0,90		▪	▪	▪	▪	▪
1 1/4 x .042	34 x 1,10		▪	▪	▪		
1 1/2 x .050	41 x 1,30	▪	▪	▪			
2 x .063	54 x 1,60	▪	▪				
2 5/8 x .063	67 x 1,60	▪	▪				

STAY INFORMED 402




SPECIAL APPLICATIONS

490 PAL-CUT



- The rustic for repair and dismantling of wooden pallets
- Special tooth geometry guarantees constant performance while sawing through nails and staples

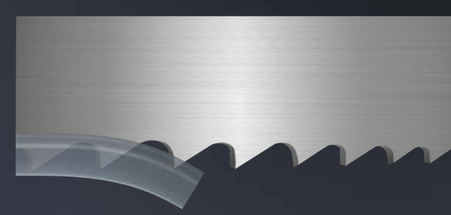


Dimensions		Tooth	
inch	mm	6	5/8
1 1/4 x .042	34 x 1,10		■

Carbon

1 1/4 x .042	32 x 1,10	■	■

STAY INFORMED 490

CARBIDE – WHY SO SUCCESSFUL?

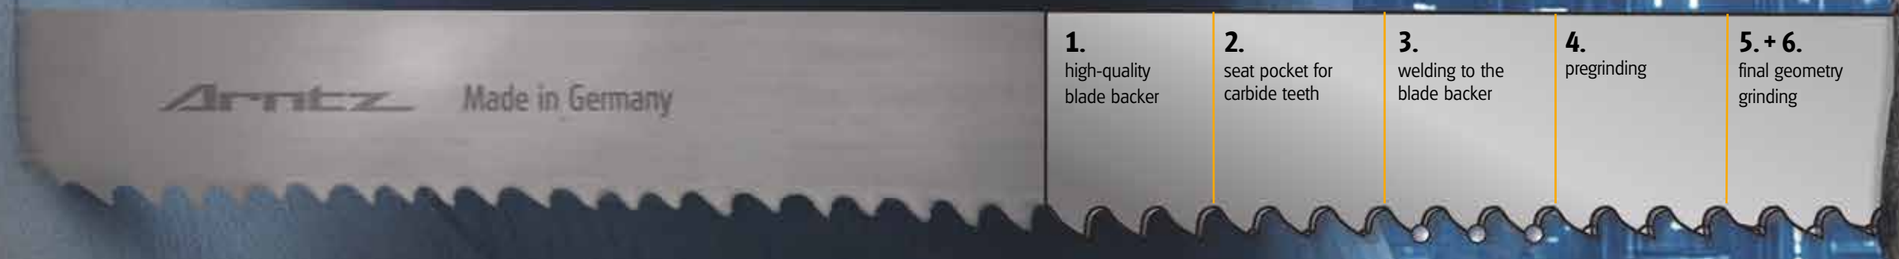

Our Band Saw Blades are true high-performance professionals, developed for absolutely clean and smooth results under extreme cutting conditions.

FLEXIBLE

The blade backer consists of a specially alloyed spring steel and forms the optimal foundation for high-performance cutting.

PRECISELY GROUND

The subsequent grinding processes are crucial to ensure the correct tooth geometry and excellent performance.

PERFECTLY CONNECTED

Each ARNTZ Band Saw Blade undergoes a specialized process in which the highly wear-resistant carbide teeth are securely bonded to the backing strip through welding techniques.


TARGETED


The carbide tipped tooth tips work highly efficiently and achieve up to 3 times higher cutting performance in low-vibration cuts.

AEROSPACE/PRECISION METAL WORKING

626 BLACK-LINE TC



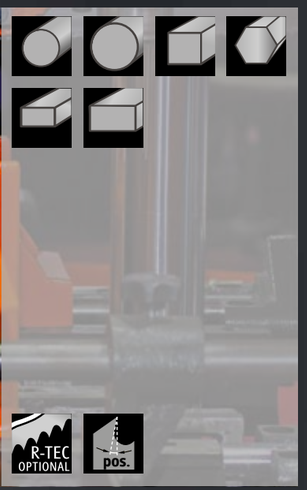

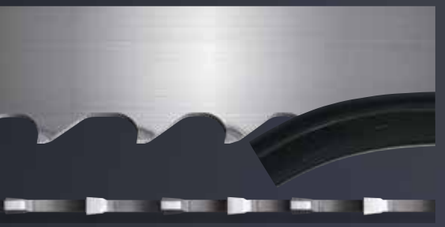


- Robust triple chip geometry for consistent performance
- Positive tooth angle with high-low tooth design for increased penetration
- Carbide grade with high resistance


Dimensions		Tooth				
inch	mm	0,75/1,25	1/1,3	1,4/2	2/3	3/4
1 x .035	27 x 0,90				■	■
1 1/4 x .042	34 x 1,10				■	■
1 1/2 x .050	41 x 1,30			■	■	■
2 x .050	54 x 1,30			■	■	■
2 x .063	54 x 1,60		■	■	■	■
2 5/8 x .063	67 x 1,60	■	■			
3 x .063	80 x 1,60	■		■		

626 STAY INFORMED

AEROSPACE/PRECISION METAL WORKING STEEL MANUFACTURING

622 BLACK-LINE S

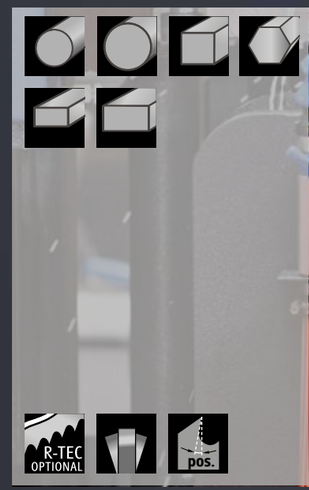

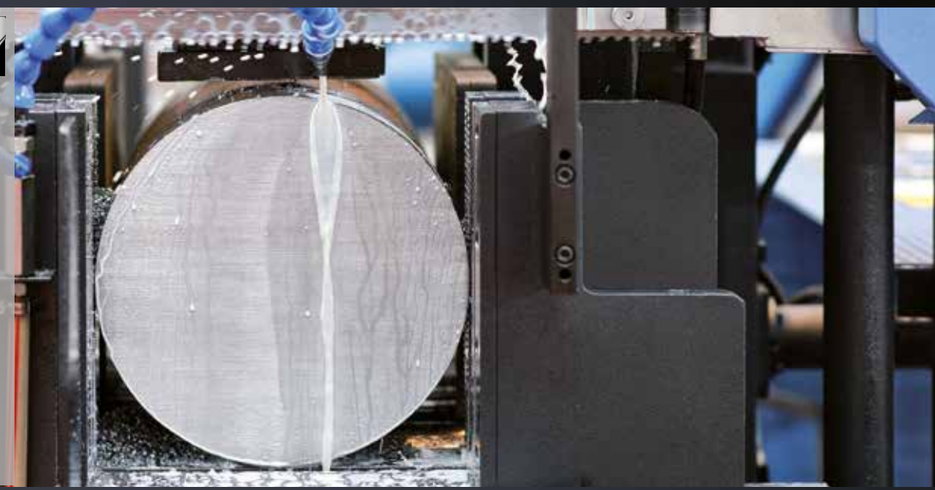

- Modified triple chip geometry combined with set teeth
- Wide kerf to create excellent cut stability
- Robust performance in all machine types




Dimensions		Tooth			
inch	mm	1,4/2	2/3	3	3/4
3/4 x .035	20 x 0,90			■	
1 x .035	27 x 0,90		■	■	■
1 1/4 x .042	34 x 1,10		■		■
1 1/2 x .050	41 x 1,30	■	■		■
2 x .063	54 x 1,60	■	■		
2 5/8 x .063	67 x 1,60	■			

STAY INFORMED 622

STEEL MANUFACTURING

650 SILVER-LINE



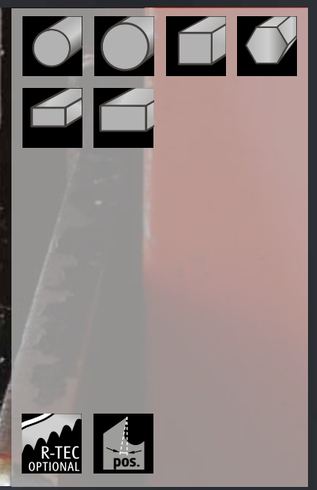




- Multi-chip design
- Developed for fast band speeds
- High positive rake angle to increase penetration

Dimensions		Tooth			
inch	mm	1/1,3	1,4/2	2/3	3/4
1 1/4 x .042	34 x 1,10			■	■
1 1/2 x .050	41 x 1,30		■	■	■
2 x .050	54 x 1,30			■	■
2 x .063	54 x 1,60		■	■	■
2 5/8 x .063	67 x 1,60	■	■		
3 x .063	80 x 1,60		■		

650 STAY INFORMED

STEEL MANUFACTURING, AEROSPACE/PRECISION METAL WORKING

660 SL-9

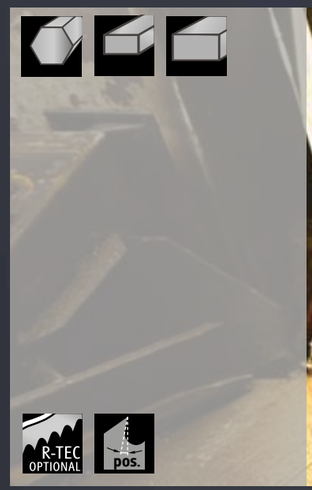



- High performance chrome backer with enhanced carbide grade for maximum performance
- Multi-chip geometry to provide faster cutting times
- High positive rake angle to increase penetration




Dimensions		Tooth			
inch	mm	0,75/1,25	1/1,3	1,4/2	2/3
1 1/2 x .050	41 x 1,30			■	■
2 x .063	54 x 1,60		■	■	■
2 5/8 x .063	67 x 1,60	■	■	■	
3 x .063	80 x 1,60	■		■	

STAY INFORMED 660

651 SILVER-LINE N



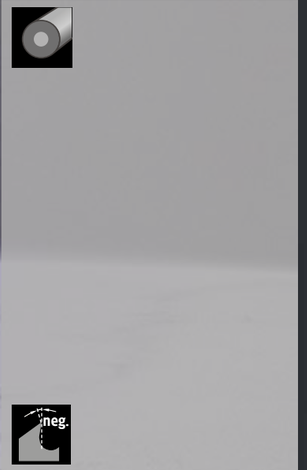



- The expert for surface hardened workpieces
- Special blade with negative rake angle
- Multi chip geometry for highest cutting performance

Dimensions		Tooth	
inch	mm	2/3	3/4
1 x .035	27 x 0,90		■
1 1/4 x .042	34 x 1,10		■
1 1/2 x .050	41 x 1,30	■	■

651 STAY INFORMED

RECYCLING/FOUNDRIES, AUTOMOTIVE/TRANSPORTATION

643 ALU-LINE





- Triple chip design
- Carbide grade designed for high abrasion
- Developed for high-speed nonferrous applications



Dimensions		Tooth					
inch	mm	0,65/0,95	0,75/1,25	1,4/2	2/3	3	3/4
3/4 x .035	20 x 0,90					■	
1 x .035	27 x 0,90				■	■	■
1 1/4 x .042	34 x 1,10			■	■	■	■
1 1/2 x .050	41 x 1,30			■	■		
2 x .050	54 x 1,30			■	■		
2 x .063	54 x 1,60		■	■			
2 5/8 x .063	67 x 1,60		■	■			
3 x .063	80 x 1,60	■	■				


STAY INFORMED 643

SPECIAL APPLICATIONS

623 STONE-LINE S








- The confident choice for softer construction materials like aerated concrete, insulation boards and insulating materials
- Set Carbide Tipped Band Saw Blade with wide clearance reduces jamming and buildup of deposits


Dimensions		Tooth
inch	mm	3
1 x .035	27 x 0,90	■

623 STAY INFORMED

621 STONE-LINE RT

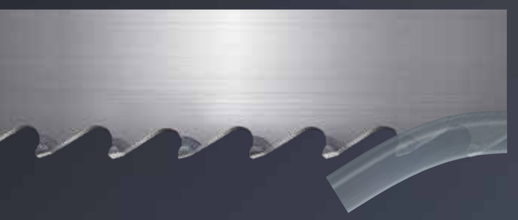





- The master for hard and abrasive construction materials like hollow clay blocks and perforated bricks
- Vibration-free cutting with reduced force required due to high-performance, precision-ground tooth geometry
- Perfect cutting results

Dimensions		Tooth
inch	mm	2/3
1 x .035	27 x 0,90	■
1 1/4 x .042	34 x 1,10	■

621 STAY INFORMED

100 CS-1

- Flexible band back with hardened teeth
- Suitable for everyday workshop purposes

CS

Dimensions		Tooth													■ Standard tooth 0° ■ Hook tooth
inch	mm	2	3	4	4	6	6	8	10	12	14	18	24	32	
1/8 x .025	3 x 0,65										■	■	■		
3/16 x .025	5 x 0,65								■		■	■	■		
1/4 x .025	6 x 0,65		■*		■	■	■	■	■		■	■	■	■	
5/16 x .025	8 x 0,65				■	■*		■	■*		■*	■*	■*	■*	
3/8 x .025	10 x 0,65		■	■	■	■	■	■	■		■	■	■*	■*	
1/2 x .025	13 x 0,65		■	■	■	■	■	■	■		■	■	■	■	
5/8 x .032	16 x 0,80	■*	■	■	■	■		■	■		■	■*	■*	■*	
3/4 x .032	19 x 0,80	■	■	■	■	■	■	■	■		■	■	■*	■*	
1 x .035	25 x 0,90	■	■	■	■	■		■*	■		■				
1 1/4 x .035	32 x 0,90	■													
1 1/4 x .042	32 x 1,10		■	■		■		■*	■*						

110 CS-2

- Spring hardened band back with hardened teeth
- For increased wear resistance and long tool life.

CS

3/16 x .016	5 x 0,40										■		■	
3/16 x .025	5 x 0,65								■		■			
1/4 x .016	6 x 0,40						■							
1/4 x .025	6 x 0,65				■	■	■	■	■		■	■	■	
5/16 x .025	8 x 0,65			■	■	■	■	■	■		■	■		
3/8 x .025	10 x 0,65		■	■	■	■	■	■	■		■	■	■	
1/2 x .025	13 x 0,65		■	■	■	■	■	■	■		■	■	■	
5/8 x .025	16 x 0,65		■	■	■	■		■		■*	■			
5/8 x .032	16 x 0,80		■		■		■		■*		■	■*		
3/4 x .032	19 x 0,80		■		■	■		■	■*		■	■*		
1 x .035	25 x 0,90		■	■		■		■	■		■*			
1 1/4 x .042	32 x 1,10			■*										

* Special items available upon request

PROFESSIONAL ACCESSORIES

PA



Tension measuring device

Wrong tension of band can be the reason for crooked cuts or can cause blade breakage.
Therefore, the band tension should be checked frequently. Detailed instructions explain how to select and control the right tension of the band saw blade.



Refractometer

The correct concentration of cooling liquid is important for optimum life time of ARNTZ Band Saw Blades.
To check the right concentration of liquid while operating it is recommended to use the ARNTZ Refractometer.



Application toolkit

Making sure your blade runs under perfect conditions. Featuring: Tension measuring device, refractometer, tacho-meter, accessories and more.

Arntz



HEAD OFFICE



ARNTZ GmbH + Co. KG
Lenneper Straße 35
42855 Remscheid
GERMANY

Tel. +49(0)2191.9986 - 01
Fax +49(0)2191.9986 - 199

info@arntz.de
www.arntz.de



ARNTZ, Inc.
320 International Circle
Summerville, SC 29483
USA

Tel. +1 843.873 - 7850
Fax +1 843.873 - 7890

sales-usa@arntz.de
www.arntz.us

Follow us on LinkedIn

www.arntz.us

POWERED BY Est. Arntz 1793 TRADITION

270326 Subject to change without notice.